



# Night VFR checklist

## To fly in command

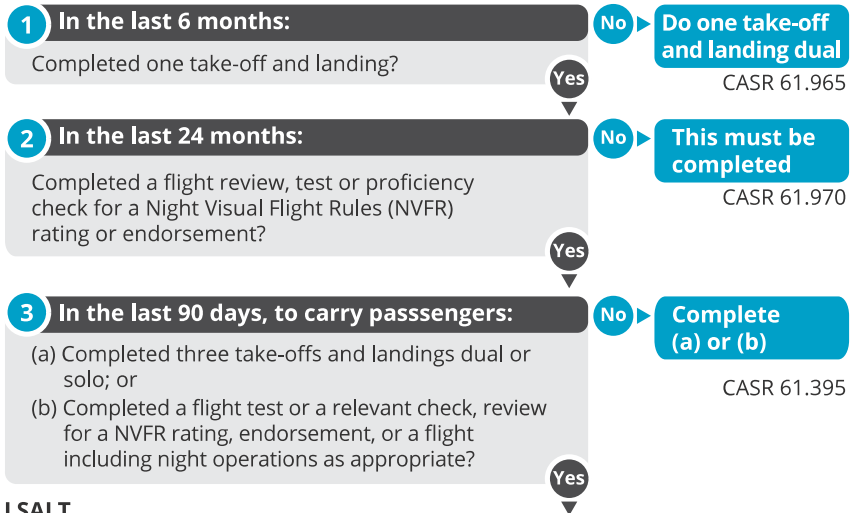


## LSALT

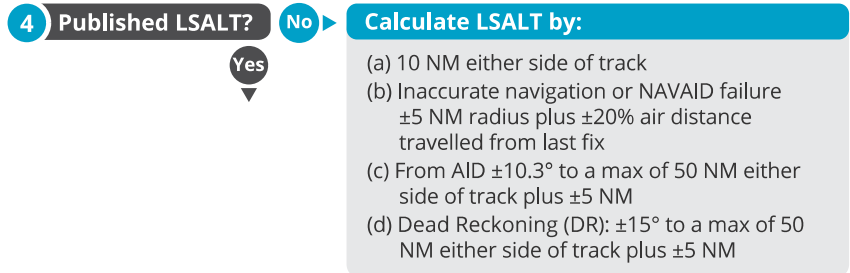

AIP GEN 3.3

## Weather and NOTAMs

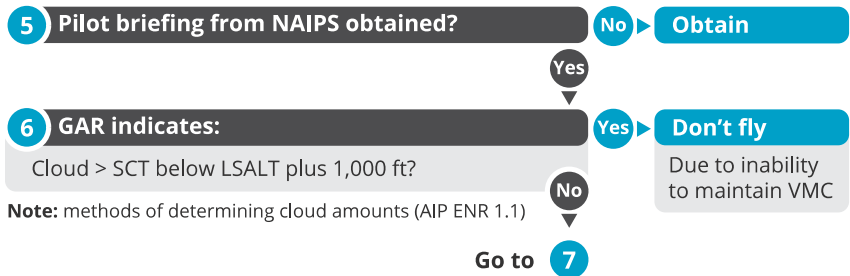

**7 TAF indicating the presence, PROB30 or PROB40 of:**

- (a) Cloud > SCT below 1,500 ft
- (b) Visibility < 8 km
- (c) Crosswind > max for aircraft?

**Yes** ▶ **Plan for alternate**

AIP ENR 1.1

**No** ▼

**8 NAVAID:**

Aerodrome served by NAVAID + aircraft equipped with NAVAID?

**No** ▶ **Plan for alternate**

Within 1 hr that has NAVAID

**Yes** ▼

**9 Lighting:**

- (a) Pilot Activated Lighting (PAL) system + standby power supply + responsible person
- (b) Portable with responsible person?

**No** ▶ **Plan for alternate**

Alternates with PAL do not need a responsible person if dual VHF equipped or 1 x VHF + HF + 30 min holding

**Yes** ▼

**Aircraft equipment**

**10 Aircraft instruments:**

(a) Airspeed indicator	(d) Clock	(g) Turn and slip
(b) Altimeter	(e) AI	(h) Suction gauge
(c) Compass	(f) DG	(i) VSI

**No** ▶ **Don't fly**

**Yes** ▼

**11 Aircraft lighting:**

- (a) Instrument lights with variable illumination
- (b) One landing light for private, two landing lights for commercial

**No** ▶ **Don't fly**

**Yes** ▼

**12 Aircraft radio equipment:**

- (a) 1 x VHF radio
- (b) 1 x NAVAID (NDB, VOR or certified GNSS)
- (c) SSR transponder if operating in CTA/RADAR?

**No** ▶ **Don't fly**

**Yes** ▼

**13 SARTIME or Flight note:**

Submitted 30 mins before EOBT if travelling:

- (a) Further than 120 NM
- (b) Through a designated remote area or
- (c) Over water

**No** ▶ **Submit one**

**Yes** ▶ **Enjoy your flight**